

Product Datasheet model uvex ultravision 9301 613

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- classic safety goggle suitable for a wide range of applications
- flexible face seal naturally moulds to any facial shape
- generous internal volume accommodating prescription spectacles and frame recesses to locate the side arms ensuring a comfortable fit
- closed ventilation system – gas-proof
- length-adjustable textile headband for a secure fit and individual adaptability
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100% protection against dangerous UV radiation up to 400 nm
- a sustainable benefit: lenses can be replaced when required
- metal-free

2. Technical Details Body

Frame

Material	PVC
Version	gas-proof
Colour	yellow

Headband

Material	synthetic
Features	individually adjustable
Colour	anthracite, yellow

Headband Hooks

Material	PC
Colour	anthracite

Marking

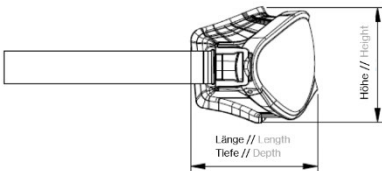

Manufacturer 's ID code	W
Applicable EN norm	166
Field of use	3 (drops and splashes of liquid) 4 (large dust particles) 5 (gases and fine dust particles)
Impact resistance	B (120 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens

Material	PC
Thickness	2.2 mm at PD
Coating	uvex supravision excellence
Colour	clear
UV protection	UV400
Replacement lens	9301255
Marking	
Filter	2C-1.2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	B (120 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	133g	
Dimensions (L x W x B) in approx. mm	  picture only for reference	
	95 x 196 x 91	
	Packing unit 1	Packing unit 2
EAN Code	4031101067742	4031101711133
Quantity in pcs.	1	90
Dimensions (L x W x H) in approx. mm	 picture only for reference	
	100 x 200 x 91	600 x 400 x 400
Net weight in approx. g	133	11,970
Gross weight in approx. g	151	14,490
Country of Origin	Czech Republic	

5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II